


AMTEC

Applied Manufacturing Technologies, Inc.

Rapid (60, 90, 130 Cups)

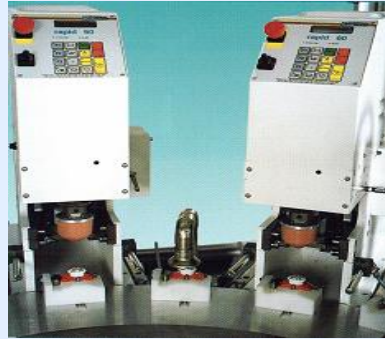

Specifications

Model	Rapid 2000/60-1	Rapid 2000/60-3	Rapid 2000/90	Rapid 2000/130
Single Cycle	-	Yes	Yes	Yes
Continuous run	-	Yes	Yes	Yes
Linearly adjustable speed	-	Yes	Yes	Yes
Ink/Doctoring cup diameter	60 mm	60 mm	90 mm	130 mm (optionally 140)
Cycles/hr	Max. 8,000	1,500-6,000	1,300-5,400	1,700-4,5000
Cliché size, max.	70 x 140 mm	70 x 140 mm	100 x 215 mm	150 x 300 mm
Print image size, max.	55 mm	55 mm	80 mm	120 mm
Pad stroke onto cliché max.	85 mm	85 mm	123 mm	160 mm
Printing pressure	500 N	500 N	1,500 N	2000 N
Drive	Externally	Electro-mechanic	Electro-mechanic	Electro-mechanic
Control	-	PLC	PLC	PLC
Control Voltage	-	24 V/DC	24 V/DC	24 V/DC

Website: www.amtecinc.com

Email : sales@amtecinc.com

APPLIED MANUFACTURING TECHNOLOGIES, INC.
3565 E. Enterprise Drive, Anaheim, CA 92807
Tel: 714-630-9530 Fax: 714-630-9531 Toll Free: 888-634-1143